




Hexagon

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

Self-Tapping Screws

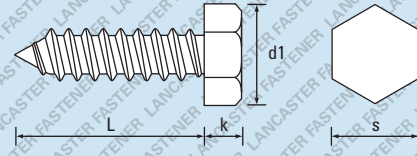

Further technical data is available on pages 234 - 236

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm	
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge	
d1 - max	-	-	-	-	-	-	-	-	d1 - max	
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom	
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max	
Recess	-	-	-	-	-	-	-	-	Recess	
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins	
4.5									3/16	
6.5									1/4	
8									5/16	
9.5			16,000 1,000 0.76			13,000 1,000 1.29	12,500 1,000 1.70		3/8	
13			16,000 1,000 0.92			12,000 1,000 1.54	9,000 1,000 2.02	6,000 1,000 2.72	4,500 500 4.25	1/2
16					10,000 1,000 1.76	8,000 1,000 2.32	5,000 1,000 3.09	4,000 500 4.77		5/8
19			13,000 1,000 1.23			8,000 1,000 1.97	7,000 1,000 2.61	5,000 1,000 3.48	3,700 500 5.30	3/4
22										7/8
25					7,000 1,000 2.45	6,000 1,000 3.19	4,800 500 4.25	3,000 500 6.35		1
32							5,000 500 3.88	3,500 500 5.14	2,300 250 7.57	1 1/4
38							4,000 500 4.46	2,500 500 5.90	2,300 250 8.63	1 1/2
45								2,000 250 9.89		1 3/4
50								2,000 250 6.96	1,700 250 10.36	2
57										2 1/4
63										2 1/2
70										2 3/4
75										3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABHEX63190ZC
LTABHEX35130ZN

PRODUCT DESCRIPTION EXAMPLE

6.3 x 19.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 13.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Black (CR3)