


T-Drive® (6-Lobe) Pan DIN 7985

A2 Stainless Steel



Thread	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Thread
Dia. Gauge	-	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.20	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.42	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	-	s - A/F
Recess	T5	T6	T8	T10	T15	T20	T25	T30	T40	Recess

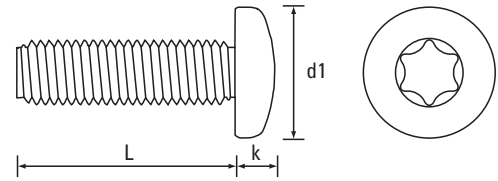

Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ssmsmtdrpana2>

L - Length mm										L - Length mm
3	●									3
4	●	●	●	●						4
5	●		●	●		●				5
6	●	●	●	●		●	●			6
8	●	●	●	●		●	●	●		8
10	●	●	●	●		●	●	●		10
12		●	●	●		●	●	●		12
14										14
16			●	●		●	●	●		16
18										18
20			●	●		●	●	●		20
22										22
25			●	●		●	●	●		25
30				●		●	●			30
35				●		●				35
40				●		●	●	●		40
45				●						45
50				●		●				50
55										55
60										60
70										70
80										80
90										90
100										100

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
 SSMSMTRPAN50008A2

PRODUCT DESCRIPTION EXAMPLE  
 M5 x 8 T-Drive® (6-Lobe) Pan DIN 7985 Machine Screw A2 Stainless Steel