



TAP-FIX®


## Thread Rolling Screws

FOR METAL

Washer Hexagon

Steel / Zinc Plated (CR3) &amp; Lubricated &amp; Steel / Black (CR3)

RoHS 2 Compliant

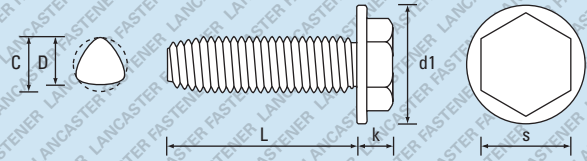

## ANSI B18.6.4

Further technical data is available on page 240

Dia.	2.56 UNC	4.40 UNC	6.32 UNC	8.32 UNC	10.24 UNC	10.32 UNF	¼" - 20 UNC	-	Dia.
Dia. D max	0.084	0.109	0.135	0.161	0.185	0.187	0.246	-	Dia. D max
Dia. C max	0.0875	0.1145	0.141	0.167	0.194	0.193	0.255	-	Dia. C max
d1 - max	0.166	0.243	0.328	0.348	0.414	0.414	0.520	-	d1 - max
k - max	0.066	0.079	0.118	0.141	0.151	0.151	0.240	-	k - max
s - A/F max	0.125	0.188	0.250	0.250	0.312	0.312	0.375	-	s - A/F max
L- Length ins	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
3/16									3/16
1/4			20,000   1,000   0.94	15,000   1,000   1.28					1/4
5/16									5/16
3/8			18,000   1,000   1.12	11,000   1,000   1.50	10,000   1,000   2.32	14,000   1,000   2.36			3/8
7/16									7/16
1/2				11,000   1,000   1.72	7,000   1,000   2.63	8,000   1,000   2.63	3,500   500   5.19		1/2
9/16									9/16
5/8				10,000   1,000   2.08			3,000   500   5.77		5/8
3/4							3,000   500   6.34		3/4
7/8									7/8
1							2,000   250   7.51		1
1 1/4							2,000   250   8.87		1 1/4
1 1/2									1 1/2
1 3/4									1 3/4
2									2
2 1/4									2 1/4
2 1/2									2 1/2

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267  
 for further detail.

## PRODUCT CODE EXAMPLE

TTUCWWHX48130ZC  
 TTUCWWHX35130ZN

## PRODUCT DESCRIPTION EXAMPLE

10.24 UNC x 1/2 Washer Hexagon Unified Tap-Fix® Screw Steel / Zinc Plated (CR3)  
 6.32 UNC x 1/2 Washer Hexagon Unified Tap-Fix® Screw Steel / Black (CR3)

Tap-Fix® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.