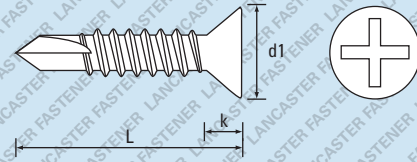


Self-Drilling Screws

Cross Recess (H) Countersunk

A2 Stainless Steel
RoHS 2 Compliant

Also available in Steel / Zinc Plated - See page 57

Further technical data is available on page 237

FORM O

Dia. mm	2.9	3.5	3.9*	4.2	4.8	5.5	6.3	-	Dia. mm
Dia. Gauge	4	6	7	8	10	12	14	-	Dia. Gauge
d1 - max	5.50	7.30	7.50	8.40	9.30	10.30	11.30	-	d1 - max
k - ref	1.70	2.35	2.30	2.60	2.80	3.00	3.15	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	2	2	2	2	3	3	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
9.5								3/8	
13	27,000 1,000 0.70	20,000 1,000 0.94	17,000 1,000 1.30	12,000 1,000 1.49				1/2	
16	22,000 1,000 0.85	18,000 1,000 1.05	15,000 1,000 1.46	11,000 1,000 1.72				5/8	
19	14,000 1,000 1.20		13,000 1,000 1.49	9,500 1,000 1.98				3/4	
22	11,000 1,000 1.97		7,000 1,000 3.10				7/8		
25	10,000 1,000 1.65		10,000 1,000 2.10	7,000 1,000 3.40				1	
32	7,500 1,000 2.30		5,000 500 4.10				1 1/4		
38	5,000 500 2.75		4,000 500 4.45				1 1/2		
45			3,500 500 4.59				1 3/4		
50			3,000 250 4.71				2		
60								2 1/2	
70								2 3/4	
75								3	
80								3 1/4	
90								3 1/2	
100								4	

 A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

S5DFPHCSK48500A2

PRODUCT DESCRIPTION EXAMPLE

4.8 x 50.0 Cross Recess (H) Countersunk DIN 7504 FORM O Self-Drilling Screw A2 Stainless Steel

* 3.9 are manufactured to DIN 7504 Form P E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.