


Self-Tapping Screws

Cross Recess (Z) Countersunk
Steel / Zinc Plated (CR3) & Steel / Black (CR3)
 RoHS 2 Compliant

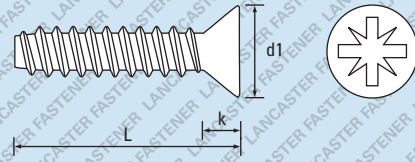

Further technical data is available on pages 234 - 236

TYPE F blunt									
Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
	4.5	150,000 1,000 0.12							
6.5	120,000 1,000 0.15	64,000 1,000 0.31	38,000 1,000 0.55						1/4
8	100,000 1,000 0.20	45,000 1,000 0.36	35,000 1,000 0.57						5/16
9.5	80,000 1,000 0.21	40,000 1,000 0.41	30,000 1,000 0.63		16,000 1,000 1.00				3/8
13	72,000 1,000 0.27	38,000 1,000 0.55	24,000 1,000 0.76		16,000 1,000 1.20	11,000 1,000 1.73			1/2
16		30,000 1,000 0.64	22,000 1,000 0.94		11,000 1,000 1.41	9,000 1,000 2.03			5/8
19			18,000 1,000 1.15		10,000 1,000 1.65	8,500 1,000 2.20			3/4
22									7/8
25			14,000 1,000 1.41		7,000 1,000 2.08	6,000 1,000 2.77			1
32					6,000 500 2.48		2,500 500 6.17		1 1/4
38							2,300 250 7.40		1 1/2
45							3,000 250 6.11	1,800 250 8.40	1 3/4
50							1,500 250 9.11		2
57							1,500 200 10.56		2 1/4
63							1,000 150 11.43		2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTBZCSK35190ZC
 LTBZCSK29130ZN

PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Countersunk Type F DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
 2.9 x 13.0 Cross Recess (Z) Countersunk Type F DIN 7982 Self-Tapping Screw Steel / Black (CR3)