
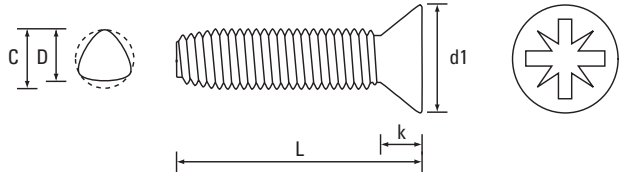


# DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

Cross Recess (Z) Countersunk FORM M DIN 965

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

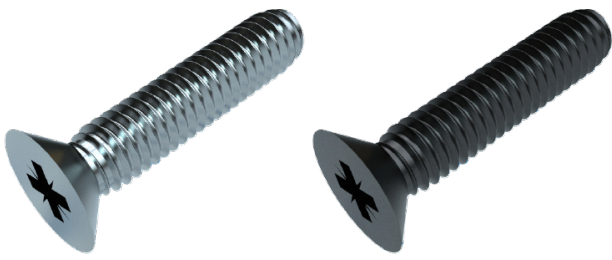

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ttmwzcskzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ttmwzcskzc">https://www.lancasterfastener.com/drawings-for-ttmwzcskzc</a>									L - Length mm
4										4
5										5
6		●	● ●	●	●					6
8		●	● ●	●	●	●				8
10		●	●	●	● ●	●	●			10
12			●	●	●	●	● ●	●		12
14										14
16			●	●	●	●	●	●		16
18										18
20			●		●	●	●	●	●	20
25			●		●	●	●	●	●	25
30					●	●	●	●	●	30
35							●			35
40						●	●	●		40
45							●			45
50							●	●		50
-										-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

TTMWZCSK25006ZC  
 TTMWZCSK40010ZN

**PRODUCT DESCRIPTION EXAMPLE**

M2.5 x 6 Cross Recess (Z) Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Zinc Plated (CR3)  
 M4 x 10 Cross Recess (Z) Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Black (CR3)