

**LANCASTER****UNIFIED**

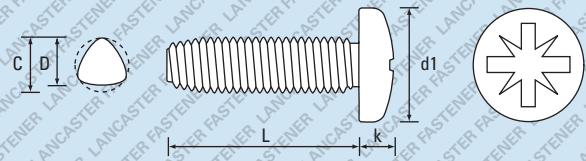
TAP-FIX®

Thread Rolling Screws

FOR METAL

Cross Recess (Z) Pan**Steel / Zinc Plated (CR3) & Lubricated & Steel / Black (CR3)**

RoHS 2 Compliant

**ANSI B18.6.4**

Further technical data is available on page 240

Dia.	2.56 UNC	4.40 UNC	6.32 UNC	8.32 UNC	10.24 UNC	10.32 UNF	¼" - 20 UNC	-	Dia.
Dia. D max	0.084	0.109	0.135	0.161	0.185	0.187	0.246	-	Dia. D max
Dia. C max	0.0875	0.1145	0.141	0.167	0.194	0.193	0.255	-	Dia. C max
d1 - max	0.167	0.219	0.270	0.322	0.373	0.373	0.492	-	d1 - max
k - max	0.062	0.080	0.097	0.115	0.133	0.175	0.218	-	k - max
Recess	1	1	2	2	2	2	3	-	Recess
L- Length ins	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
3/16	105,000 1,000 0.20	50,000 1,000 0.40	30,000 1,000 0.67						3/16
1/4	90,000 1,000 0.21	45,000 1,000 0.45	28,000 1,000 0.74			11,000 1,000 1.81			1/4
5/16			25,000 1,000 0.81						5/16
3/8	75,000 1,000 0.28	40,000 1,000 0.54	22,000 1,000 0.86	14,000 1,000 1.40	9,000 1,000 2.17	9,000 1,000 2.10			3/8
7/16			20,000 1,000 0.96						7/16
1/2		30,000 1,000 0.67	20,000 1,000 1.05	11,500 1,000 1.70	8,000 1,000 2.40		4,500 500 4.96		1/2
9/16									9/16
5/8		25,000 1,000 0.76	16,000 1,000 1.24	8,000 1,000 1.95	7,500 1,000 2.70		4,000 500 5.54		5/8
3/4			12,000 1,000 1.38		6,000 1,000 2.97		3,500 500 6.13		3/4
7/8									7/8
1							2,000 250 6.91		1
1 1/4						3,500 500 4.37			1 1/4
1 1/2							1,500 250 9.45		1 1/2
1 3/4									1 3/4
2									2
-									-
-									-

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267
for further detail.

PRODUCT CODE EXAMPLE

TTUCWZPAN29950ZC
 TTUCWZPAN35130ZN

PRODUCT DESCRIPTION EXAMPLE

4.40 UNC x 3/8 Cross Recess (Z) Pan Unified Tap-Fix® Screw Steel / Zinc Plated (CR3)
 6.32 UNC x 1/2 Cross Recess (Z) Pan Unified Tap-Fix® Screw Steel / Black (CR3)

Tap-Fix® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.