


DIN 7500 Tap-Fix® Screws


Thread Rolling Screws for Metal Applications

Washer Hexagon FORM D / DE SIMILAR

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

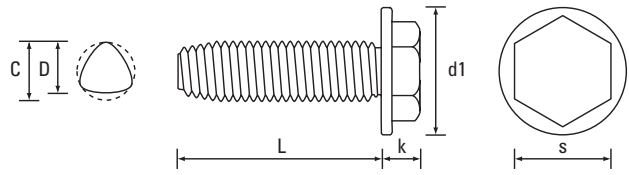

Dia. D	-	M3	M4	M4	M5	M6	M8	M10	Dia. D
Dia. C max	-	3.07	4.08	4.08	5.09	6.10	8.13	10.15	Dia. C max
d1 - max	-	6.30	8.30	8.80	10.40	13.00	16.90	22.10	d1 - max
k - max	-	2.40	3.50	4.10	4.50	5.20	7.00	9.00	k - max
s - A/F	-	5.00	5.50	7.00	8.00	10.00	13.00	17.00	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttmwwhxzc</p>									L - Length mm
4										4
5										5
6		●		●						6
8		●		●	● ●					8
10		●	●	●	● ●	●				10
12		●	●	●	● ●	●	●			12
14										14
16			●	●	● ●	● ●	●	●		16
18										18
20		●	●	●	●	●	●	●		20
25					●	●	●	●		25
30					●	●	●	●		30
35						●	●			35
40						●	●	●		40
45										45
50							●	●	●	50
60								●		60

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWWHX99030ZC
TTMWWHX60020ZN

PRODUCT DESCRIPTION EXAMPLE

M10 x 30 Washer Hexagon DIN 7500 FORM D / DE SIMILAR Tap-Fix® Screw Steel / Zinc Plated (CR3)
M6 x 20 Washer Hexagon DIN 7500 FORM D / DE SIMILAR Tap-Fix® Screw Steel / Black (CR3)