


Self-Drilling Screws

Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Countersunk DIN 7504 FORM P SIMILAR

Steel / Zinc Plated (CR3)

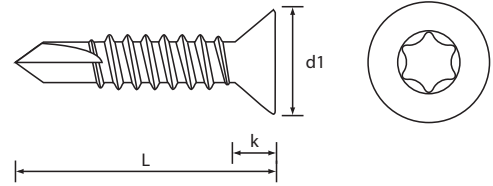

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	-	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T10	T15	T15	T20	T25	T27	T30	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-dfdptxcskzc>

L - Length mm									L - Length ins
6.5									1/4
9.5									3/8
13									1/2
16					●				5/8
19				●	●				3/4
22									7/8
25				●	●	●			1
32				●	●	●			1 1/4
38					●	●		●	1 1/2
45						●			1 3/4
50						●	●	●	2
60								●	2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
DFDPTXCSK39190ZC

PRODUCT DESCRIPTION EXAMPLE
3.9 x 19.0 T-Drive® (6-Lobe) Countersunk DIN 7504 FORM P SIMILAR Self-Drilling Screw Steel / Zinc Plated (CR3)