


Self-Tapping Screws


Screws for Sheet Metal Applications

Cross Recess (Z) Countersunk DIN 7982 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

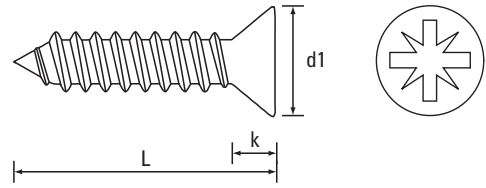

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabzcskzc</p>	L - Length ins
---------------	---	----------------

L - Length mm	4.5	6.5	8	9.5	13	16	19	22	25	32	38	45	50	57	63	70	75	L - Length ins
4.5	●																	3/16
6.5	●	●	●															1/4
8	●	●	●															5/16
9.5	●	●	● ●	●	● ●													3/8
13	●	●	● ●	● ●	● ●	● ●	● ●											1/2
16	●	●	● ●	● ●	● ●	● ●	● ●	●										5/8
19		●	● ●	●	● ●	● ●	● ●	●	● ●									3/4
22		●	●	●	● ●	●												7/8
25		●	● ●	●	● ●	● ●	● ●	●	● ●									1
32		●	● ●	●	● ●	● ●	● ●	●	● ●									1 1/4
38			● ●	●	● ●	● ●	● ●	●	● ●									1 1/2
45			●		● ●	● ●	● ●	●	● ●									1 3/4
50			●	●	● ●	● ●	● ●	●	● ●									2
57					●	●												2 1/4
63					●	●			●									2 1/2
70					●													2 3/4
75						●	●	●										3

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABZCSK48160ZC
 LTABZCSK35250ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 16.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
 3.5 x 25.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Black (CR3)

Screws for Plastics
 ISO & DIN 7500 Tap-Fix® Screws
 Machine Screws
 Self-Tapping Screws
 Self-Drilling Screws
 Micro Diameter Screws
 Hammer Drive Screws
 K-Series® Setzmuttern
 Rivet Bushes
 Self-Clinching Fasteners
 CD Weld Studs
 Brass Inserts for Plastics